




SGC40 and SGS40 Sight Glasses

DN32 shown having an integral flange

Please note that flanges are welded onto the body of the smaller DN15 to DN25 units.

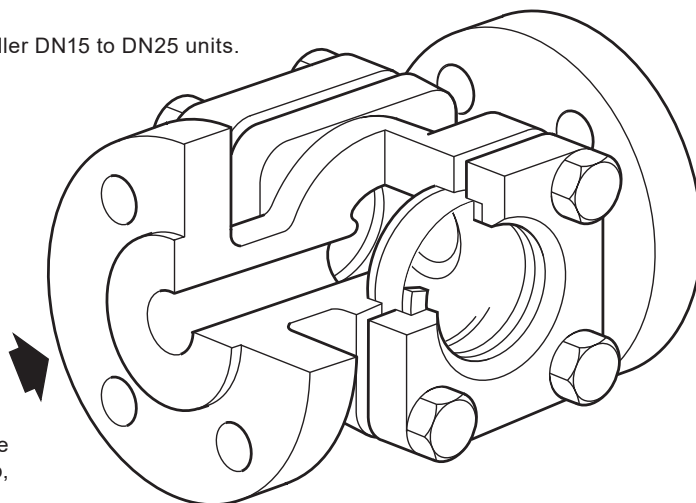

Description

The SGC40 cast carbon steel and SGS40 stainless steel are double window sight glasses having screwed, sanitary clamp, socket weld and flanged connections.

Standards

These products fully comply with the requirements of the Pressure Equipment Directive (PED) and carry the **CE** mark when so required.

Certification

These products are available with a manufacturer's Typical Test Report and if specified certification to EN 10204 3.1.

Note: All certification/inspection requirements must be stated at the time of order placement.

Optional extras:

- Visual flow indicator flap to check the flow of the liquid in the pipeline.
- Spring: The visual flow indicator flap can be spring loaded for applications on vertical lines or where there is high flowrates.
- Mica glass protectors for severe applications - When these have been specified the nomenclature becomes SGC40M and SGS40M.
- Glass filled PTFE gasket.

Please see table below to identify when Mica glass protectors are to be used.

Application	Glass choice to be used
Steam or > pH9	Mica glass protectors and Borosilicate glass windows
>150 °C and > pH7	Mica glass protectors and Borosilicate glass windows
<150 °C and < pH7	Borosilicate glass windows only

Sizes and pipe connections

½", ¾", 1", 1¼", 1½" and 2" Screwed BSP, NPT and Socket weld.


DN15, DN20, DN25, DN40 and DN50 Sanitary clamp connections to ASME BPE.

DN15, DN20, DN25, DN32, DN40, DN50, DN65, DN80 and DN100.

Flanged EN 1092 PN40, ASME Class 150 and Class 300, JIS/KS 10 and JIS/KS 20.

Flanged versions have face-to-face dimensions in accordance with EN 558 Series 1.

Materials

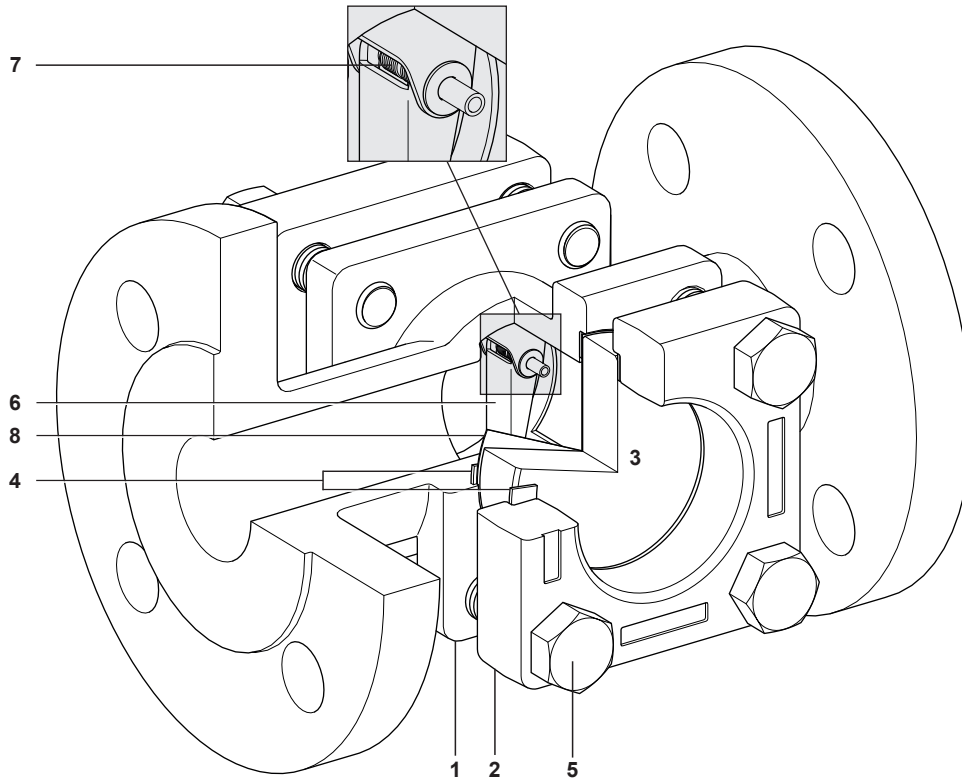

DN32 shown having an integral flange
Please note that flanges are welded onto the body of the smaller DN15 to DN25 units.

No.	Part	Material	
1	Body*	SGC40	Carbon steel EN 10213 1.0619+N/ASTM A216 WCB
		SGS40	Stainless steel EN 10213 1.4308/ASTM A351-CF8

* The materials shown for the body are for all available connections and for the DN32 to DN100 integrally flanged units.
Please note that flanges are welded onto the body of the smaller DN15 to DN25 units - See flange material below:


* Flange material for sizes DN15 to DN25				
SGC40	Carbon steel	C22.8 according to EN 10222-2/A105N according to ASTM A105		
SGS40	Stainless steel	1.4571 according to EN 10222-5/316Ti according to ASTM A182		
2	Cover	SGC40	DN15 to DN50	Carbon steel C22.8 according to EN 10222-2/A105N according to ASTM A105
			DN65 to DN100	Carbon steel EN 10213 1.0619+N/ASTM A216 WCB
		SGS40	Stainless steel	EN 10213 1.4308/ASTM A351-CF8
3	Window	Borosilicate glass		DIN 7080
4	Gaskets	Reinforced exfoliated graphite (standard) or PTFE Glass filled (optional)		
5	Cover bolts	Stainless steel		EN ISO 3506-1 A2-70

Materials - Optional extras


6	Visual flow indicator flap	Stainless steel
7	Spring	Stainless steel
8	Glass protectors	Mica

Pressure/temperature limits

**SGC40
Carbon
steel**

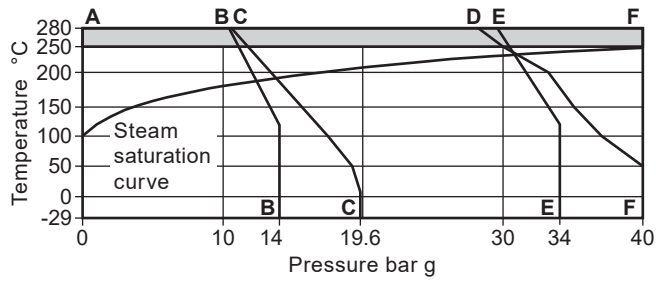

**SGS40
Stainless
steel**

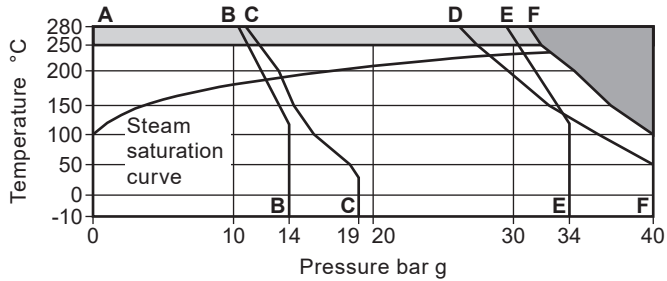

Only graphite gasket to be used on this region.

The product **must not** be used in this region.

A-B-B Flanged JIS 10 and KS 10.

A-C-C Flanged ASME 150.

A-D-F Flanged EN 1092 PN40.

A-E-E Flanged JIS 20 and KS 20.

A-F-F Screwed BSP, NPT, Sanitary clamp, Socket weld and Flanged ASME 300.

Body design conditions		PN40
PMA	Maximum allowable pressure	PN40 40 bar g @ 50 °C
		ASME 150 19.6 bar g @ 38 °C
		SGC40 ASME 300 40 bar g @ 280 °C
		JIS/KS10 14 bar g @ 120 °C
		JIS/KS20 34 bar g @ 120 °C
		SGS40 PN40 40 bar g @ 50 °C
TMA	Maximum allowable temperature	ASME 150 19 bar g @ 38 °C
		SGS40 ASME 300 40 bar g @ 111 °C
		JIS/KS10 14 bar g @ 120 °C
		JIS/KS20 34 bar g @ 120 °C
		SGC and SGS40 With PTFE gasket 250 °C
		With graphite gasket 280 °C
PMO	Maximum allowable pressure for saturated steam service	PN40 31.1 bar g @ 238 °C
		ASME 150 13.8 bar g @ 198 °C
		SGC40 ASME 300 40 bar g @ 252 °C
		JIS/KS10 12.5 bar g @ 195 °C
		JIS/KS20 30.3 bar g @ 236 °C
		SGS40 PN40 28.3 bar g @ 232 °C
TMO	Maximum operating temperature	ASME 150 12.9 bar g @ 195 °C
		SGS40 ASME 300 32.8 bar g @ 241 °C
		JIS/KS10 12.5 bar g @ 195 °C
		JIS/KS20 30.3 bar g @ 236 °C
		SGC and SGS40 With PTFE gasket 250 °C
		With graphite gasket 280 °C
Minimum operating temperature		SGC40 -29 °C
Note: For lower operating temperatures consult Spirax Sarco		SGS40 -10 °C
Designed for a maximum cold hydraulic test pressure of:		60 bar g

Dimensions/weights (approximate) in mm and kg

Size	Dimensions (mm)						Weight (kg)		
	A	A1	A2	B	C	D	Flanged	Screwed Socket weld	Sanitary clamp
DN15	130	95	120	48.5	46.7	10	3.5	2	2
DN20	150	95	140	51	46.7	10	4.3	2	2.2
DN25	160	95	155	68.5	60.8	15	6.4	3.5	4
DN32	-	150	-	91.5	71.4	15	-	7	-
DN32 flanged	180	-	-	72	60.8	15	7.8	-	-
DN40	-	150	202	91.5	71.4	20	-	6.75	7.4
DN40 flanged	200	-	-	86.5	71.4	20	10.5	-	-
DN50	230	150	232	91.5	71.4	20	12.5	6	7.6
DN65	290	-	-	126.5	113.2	30	27.7	-	-
DN80	310	-	-	134	113.2	30	31	-	-
DN100	350	-	-	143	113.2	30	37	-	-

Safety information, installation and maintenance

For full details see the Installation and Maintenance Instructions (IM-P130-29) supplied with the product.

Warning:

Under certain conditions corrosive elements in the flow media can affect the inside face of the window, particularly where caustic alkali and hydrofluoric acid are present. Mica glass protectors must be used to protect the glass when the unit is used on steam applications or when the pH is higher than pH9 or when the temperature is above 150 °C with a pH greater than pH7.

Regular inspection of the glass to check for thinning of the window must be undertaken based on an assessment of your system.

If there is evidence of thinning or erosion damage then the window should be replaced immediately. Always wear eye protection when viewing the contents of the sight glass.

Reasonable steps should be taken to protect personnel from injury in the unlikely event that the window breaks.

Installation and maintenance note:

Apply the appropriate grease to SGS40 stainless steel connections and bolting to avoid cold welding.

Sight glasses should have stop valves fitted on both the inlet and outlet. It is imperative that the upstream stop valve is closed first in order to prevent overpressurisation.

Sight glasses must be fitted on the outlet side of a steam trap in either a horizontal or vertical pipeline in accordance with the flow arrow on the body. Warning: when the optional visual flow indicator flap is requested for horizontal flow applications the hinge must be placed uppermost otherwise it will not work for the purpose intended. Where the trap is a blast discharge type e.g. thermodynamic, the sight glass must be fitted at least 1 m from the trap. This is to ensure that the glass is not subjected to thermal shock or pressure.

Ensure access is available for maintenance purposes.


Disposal

The product is recyclable. No ecological hazard is anticipated with disposal of this product providing due care is taken.

How to order

Example: 1 off Spirax Sarco DN20 SGS40M sight glass having a stainless steel body, removable toughened glass windows and flanged EN 1092 PN40 connections.

The unit must be supplied complete with the optional 'visual flow indicator flap' and the 'Mica glass protectors'.

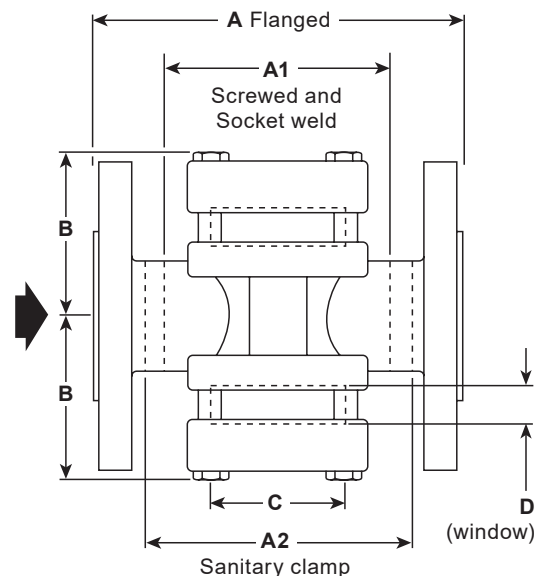

Spare parts

The spare parts available are shown in solid outline. Parts drawn in a grey line are not supplied as spares.

Available spares

Set of windows and gaskets	3, 4
Set of gaskets	4
Visual flow indicator flap	6
Mica glass protectors	8

How to order spares

Always order spares by using the description given in the column headed 'Available spares' and state the size and type of the sight glass.

Example: 1 off Set of windows and gaskets for a Spirax Sarco DN20 SGC40 sight glass.

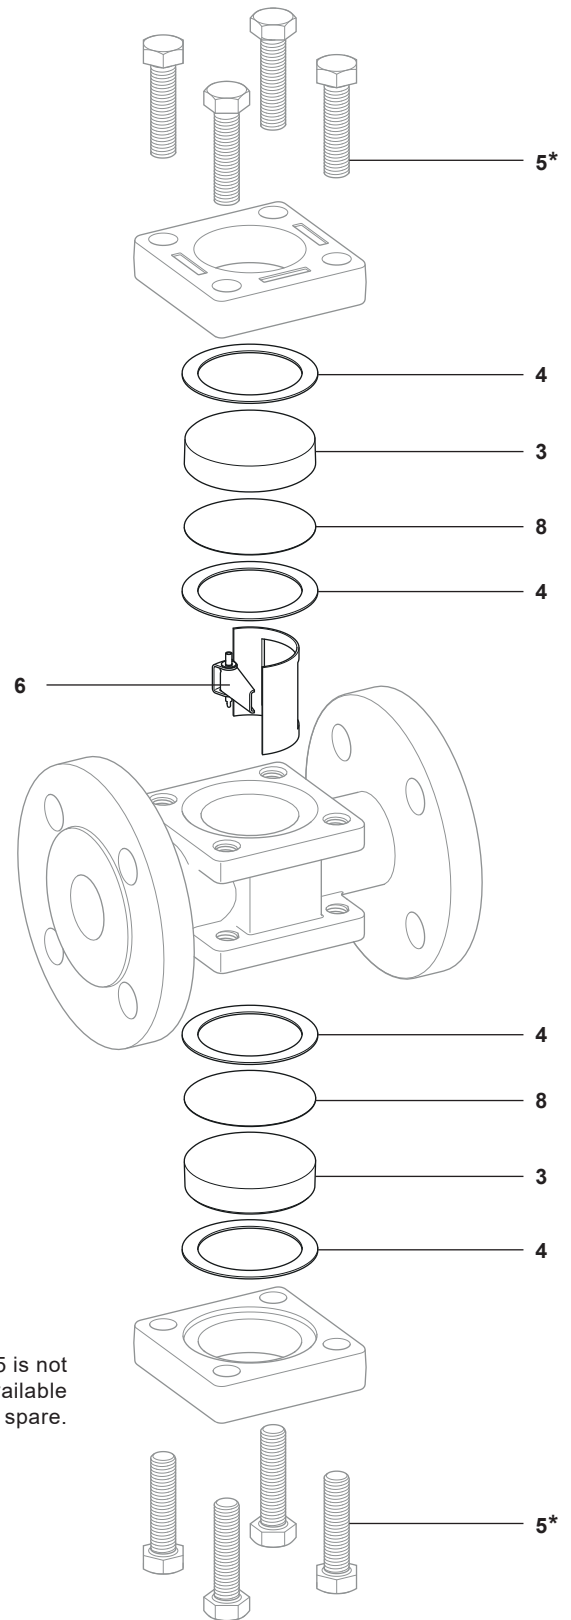




Table 1 Recommended tightening torques

Item	Size	Quantity	 or 	N m	(lbf ft)
5	DN15 - DN20	8	17 A/F M10 x 35	12	8.8
	DN25 - DN32 Flanged	8	19 A/F M12 x 50	28	20.6
	DN32 Screwed and socket weld, DN40 - DN50	8	19 A/F M12 x 60	38	28.0
	DN65 - DN100	8	23 A/F M16 x 85	132	97.3